



SAFETY AT THE HIGHEST LEVEL

Ladder Spurs

Assembly Instructions



USA

Kee Safety, Inc.
100 Stradtman Street
Buffalo, NY14206

Tel: (716) 896 4949
Fax: (716) 896 5696
Toll Free: (800) 851 5181
www.keesafety.com
Email: info@keesafety.com

Canada


Kee Safety, Ltd.
40 North Rivermede Rd., Units 6-7
Concord, Ontario L4K2H3

Tel: (905) 669 1494
Fax: (905) 669 4347
Toll Free: (877) 505 5003

PLEASE BE ADVISED: Before assembling the Ladder-Spurs for the first time, it is highly recommended that Installers familiarize themselves with the component parts and carry out a test assembly and disassembly in a safe area away from the point of final installation. All component parts detailed in the operating instructions must be used in the assembly of the system. Should a piece be missing or appear defective do not continue to assemble and contact Kee Safety immediately.

Designed to Limit 'Slip' and increase 'LATERAL STABILITY'


Step 1

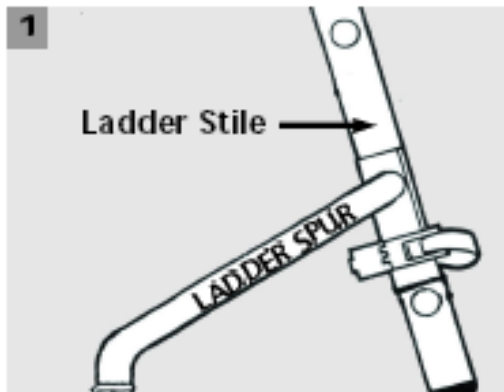

To Fit Spur

Fit the **SPUR** to the back of the side rail as shown and bring the strap around the inside, passing 1 inch only of strap through the barrel of the buckle.


Step 2

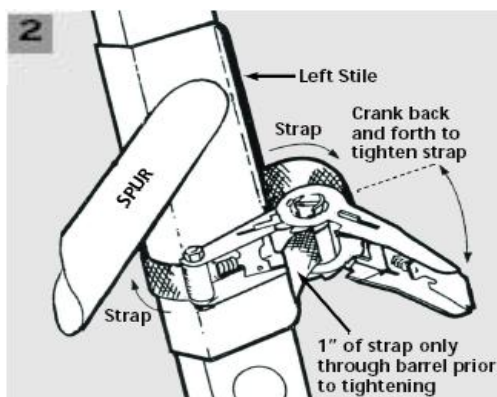

Tighten ratchet buckle

Before tightening, ensure the rubber foot is in contact with the ground. Only 1" (25mm) of the strap should be placed through the barrel prior to tightening. Crank ratchet to maximum tightness and close the lever against the Buckle.

Step 3

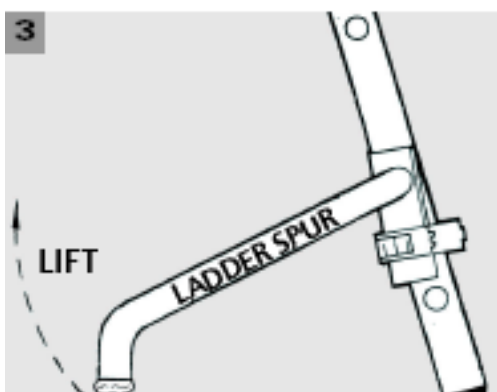

Removal

Simply open the lever right back and pull the quick-release to release the strap. Lift the **SPUR** up to unwind strap from the barrel and remove the **SPUR** from ladder side rail.

IMPORTANT SAFETY NOTE

Always assess the site conditions and remember the 4:1 rule – if you're 16 feet up the Ladder should be 4 feet from the wall at ground Level.